



REMODEL NOTES

1. REMOVE ELECTRICAL WORK FROM WALLS, CEILINGS AND OTHER SURFACES TO BE REMOVED.
2. REMOVE ABANDONED CONDUCTOR, ELECTRICAL EQUIPMENT AND ACCESSIBLE RACEWAY.
3. STORE, ON SITE, REMOVED ITEMS INDICATED FOR OWNER SALVAGE. DISPOSE OF OTHERS PROPERLY, OFF SITE.
4. BLANK OFF ABANDONED OUTLETS USING PLATE TO MATCH DEVICE COVERS OR PATCH OPENINGS AND FINISH TO MATCH ADJACENT SURFACE.
5. EXISTING EQUIPMENT DEVICES, ETC., INDICATED TO REMAIN ARE INTENDED TO REMAIN OPERATIONAL. RE-CIRCUIT OR RE-ROUTE CIRCUITS AS REQUIRED TO MAINTAIN OPERATION. REPLACE DEVICES AND COVERPLATES TO MATCH NEW DEVICES.
6. REMOVE EXISTING LIGHT FIXTURES AND ELECTRICAL WORK FROM AREAS WHERE NEW LIGHTING IS INDICATED.
7. CLEAN AND RELAMP REUSED LIGHT FIXTURES.
8. PROVIDE NEW TYPED CIRCUIT DIRECTORIES FOR PANELS WITH CIRCUIT CHANGES OR ADDITIONS.
9. EXISTING WORK IS INTENDED TO BE A REASONABLE APPROXIMATION AND IS FOR CONVENIENCE ONLY. NOT FOR THE BASIS OF BIDDING. DETERMINE EXACT QUANTITIES AND LOCATIONS AT THE JOB SITE.


DEMO ELECTRICAL FIRST FLOOR PLAN
SCALE 1/8" = 1'-0"

DEMO ELECTRICAL PLAN LINETYPE LEGEND

- TO BE REMOVED
- ◐ EXISTING TO REMAIN

ELECTRICAL DEMO KEY NOTES (APPLIES TO ED.X SHEETS)

- 1 REMOVE EXISTING EXTERIOR LIGHT, ALONG WITH ASSOCIATED WIRING, BACK TO LIGHT CONTROLS.
- 2 REMOVE ELECTRICAL WORK AND DATA CABLES ASSOCIATED WITH WALL TO BE REMOVED. REMOVE CIRCUITING BACK TO PANEL, LABEL BREAKER AS SPARE. REMOVE DATA CABLES FROM PATCH PANEL LABEL PORT AS SPARE.
- 3 REMOVE ELECTRICAL WORK AND DATA CABLES ASSOCIATED WITH SERVICE COUNTER TO BE REMOVED. REMOVE ASSOCIATED ELECTRICAL WORK BACK TO PANEL LABEL C.B. AS SPARE. REMOVE ASSOCIATED DATA CABLES TO PATCH PANEL LABEL PORT AS SPARE.
- 4 REMOVE ELECTRICAL WORK, CONDUIT AND PANEL. REFEED EXISTING TO REMAIN CIRCUITS FROM NEW PANEL L-4 IN STORAGE #107.
- 5 REMOVE DEVICE AND ALL ASSOCIATED ELECTRICAL WORK. PROVIDE BLANK COVERPLATE FOR BACKBOX.
- 6 4" WIDE SAWCUT EXISTING FLOOR SLAB FOR CONDUITS FEEDING FLOOR BOX.
- 7 REMOVE EXISTING CAN LIGHT, INCLUDING ASSOCIATED WIRING, BACK TO PANELBOARD.
- 8 REMOVE EXISTING CEILING MOUNTED LIGHT FIXTURES IN THIS ROOM INCLUDING ELECTRICAL WORK MADE OBSOLETE BY OTHER NEW WORK. LABEL PANEL C.B. AS SPARE.
- 9 REMOVE EXISTING COAX DATA PANEL, ALONG WITH ASSOCIATED ABANDONED DATA CABLES, IN ITS ENTIRETY. CUT CONDUITS 2" ABOVE FLOOR AND 2" BELOW CEILING FOR FUTURE USE. PROVIDE PLASTIC BUSHINGS ON CONDUIT.
- 10 REMOVE EXISTING FLUSH IN CEILING PROJECTOR SCREEN AND CONTROL SWITCH. RELOCATE TO LOCATION SHOWN ON SHEET E1.2.
- 11 REMOVE EXISTING IN-GROUND LIGHT, INCLUDING ASSOCIATED WIRING, BACK TO PANELBOARD.
- 12 REMOVE EXISTING LIGHT AND SWITCH FROM BOOK DROP #126. RELOCATE LIGHT FIXTURE REMOVED FROM ROOM #161 OR #162 TO MATCH EXISTING FIXTURES IN ROOM #154. INSTALL AND CONNECT TO EXISTING LIGHTING CIRCUIT AS REQUIRED.
- 13 REMOVE EXISTING ACTIVATION COVER AND ASSOCIATED ELECTRICAL WORK. PROVIDE BLANK COVER AS REQUIRED TO BE CARPETED OVER.

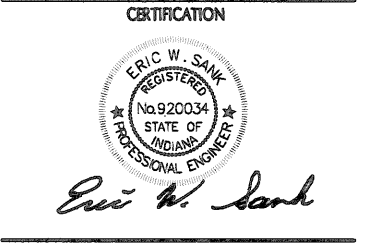

All concepts, ideas, designs, plans and details as shown on this document are the sole property of Design Collaborative, Inc. and shall not be used for any purpose without their expressed written consent. The owner shall be permitted to view copies for information and reference.

Wells County Public Library
200 West Washington Street
Bluffton, Indiana 46714



REVISION DATE BY

DATE PROJECT
11/2/2005 2005.0039

TITLE
Demo Electrical First Floor Plan

SHEET
ED1.1